



MAX4885 Evaluation Kit

General Description

The MAX4885 evaluation kit (EV kit) is a fully assembled and tested surface-mount printed-circuit board (PCB) that utilizes the MAX4885 IC to implement a complete video graphics array (VGA) 1:2 or 2:1 multiplexer.

VGA input/output connections are provided to easily interface the MAX4885 EV kit with VGA-compatible devices. The EV kit gives the option to use a single 5V DC power supply (V+) or a single 9V battery (VBATT) with 5V regulation for V+. In either power-supply input configuration, 3.3V on-board regulation is provided for VCL.

Features

- ◆ Complete 1:2 or 2:1 VGA Multiplexer
- ◆ Single 5V Power Supply
- ◆ On-Board 3.3V Regulation for VCL
- ◆ Optional 9V Battery Input with 5V Regulation
- ◆ VGA Inputs/Outputs
- ◆ Enable Input
- ◆ Surface-Mount Construction
- ◆ Fully Assembled and Tested

Ordering Information

PART	TYPE
MAX4885EVKIT+	EV Kit

+Denotes lead-free and RoHS-compliant.

Component List

DESIGNATION	QTY	DESCRIPTION
BATT	1	Vertical 9V PC snap-on connector
B_0, B_1, B_2, DDCA0, DDCA1, DDCA2, DDCB0, DDCB1, DDCB2, G_0, G_1, G_2, GND (3), H0, H1, H2, R_0, R_1, R_2, V0, V1, V2	24	Test points
C1–C4	4	0.1 μ F \pm 10%, 16V X7R ceramic capacitors (0603) Murata GRM188R71C104K TDK C1608X7R1C104K
C5	1	0.1 μ F \pm 10%, 50V X5R ceramic capacitor (0603) Murata GRM188R71H104K TDK C1608X7R1H104K
C6	1	2.2 μ F \pm 10%, 10V X5R ceramic capacitor (0603) Murata GRM188R61A225K Taiyo Yuden LMK107BJ225KA
D1–D4	4	Green surface-mount LEDs (0805)

DESIGNATION	QTY	DESCRIPTION
D5	1	3.3V shunt voltage reference (3 SC70) Maxim LM4040AEX3-3.3+ (Top Mark: ANY) Maxim LM4040DEX3-3.3+ (Top Mark: AOB)
JU1–JU5	5	3-pin headers
R1–R4	4	1k Ω \pm 5% resistors (0603)
R5	1	470 Ω \pm 5% resistor (0603)
U1	1	Complete 1:2 or 2:1 VGA multiplexer (32 TQFN-EP*) Maxim MAX4885ETJ+
U2	1	Linear regulator (6 TDFN-EP*) Maxim MAX15006BATT+ (Top Mark: APF)
U3	1	SPDT analog switch (6 SOT23) Maxim MAX4624EZT+T (Top Mark: AAAE)
VGA0, VGA1, VGA2	3	15-pin HD sub-D female VGA ports
—	5	Shunts
—	1	PCB: MAX4885 Evaluation Kit+

*EP = Exposed pad.

Component Suppliers

SUPPLIER	PHONE	WEBSITE
Murata Electronics North America, Inc.	770-436-1300	www.murata-northamerica.com
Taiyo Yuden	800-348-2496	www.t-yuden.com
TDK Corp.	847-803-6100	www.component.tdk.com

Note: Indicate that you are using the MAX4885 when contacting these component suppliers.



MAX4885 Evaluation Kit

Quick Start

Recommended Equipment

Before beginning, the following equipment is needed:

- Single 9V battery or 7V to 13V power supply
- One or two VGA inputs
- VGA-compatible output (e.g., monitor)

Procedure

The MAX4885 EV kit is a fully assembled and tested surface-mount PCB. Follow the steps below to verify the board operation:

- 1) Verify that all jumpers are configured as shown below:

JU1	1-2
JU2–JU5	2-3

- 2) Connect 7V to 13V power supply to VBATT and GND pads or connect a single 9V battery to the battery terminals.
- 3) Connect a VGA source to VGA0.
- 4) Connect VGA-compatible outputs to VGA1 and/or VGA2.
- 5) Enable the VGA source.
- 6) Verify outputs at VGA1 or VGA2.

Detailed Description

The MAX4885 EV kit is a fully assembled and tested surface-mount printed-circuit board (PCB) that utilizes the MAX4885 IC to implement a complete VGA 1:2 or 2:1 multiplexer.

VGA input/output connections are provided to easily interface the MAX4885 EV kit with VGA-compatible devices. The EV kit gives the option to use a single 5V DC power supply (V+) or a single 9V battery (VBATT) with 5V regulation for V+ or 7V to 13V power supply to VBATT. In either power-supply input configuration, 3.3V on-board regulation is provided for VCL.

The EV kit provides jumpers to control the various features of the MAX4885 IC, such as the charge pump, enable input, mode select, and logic select. Test points are also provided to monitor the signals at each input/output.

Input Power Supply

The MAX4885 EV kit gives the flexibility of accepting a single 5V input power supply (V+) or 9V battery/power supply (VBATT) input. The input supply option is set by configuration of jumper JU1, as shown in Table 1. When VBATT is selected, the voltage is stepped down to 5V through the MAX15006 linear regulator. Regardless of setting, only one supply is necessary to power the EV kit as voltage VCL is provided through on-board regulation.

Table 1. Jumper JU1 Functions

SHUNT POSITION	EV KIT INPUT SUPPLY
1-2*	VBATT (9V battery/power supply)
2-3	V+ (5V supply)

*Default position.

Charge-Pump Enable (\overline{QP})

Jumper JU2 controls an internal charge pump used to enhance RGB switch performance. By configuring JU2 to the desired setting, as shown in Table 2, the internal charge pump can be enabled or disabled. The internal charge pump is enabled by default.

Table 2. Jumper JU2 Functions

SHUNT POSITION	\overline{QP} PIN	INTERNAL CHARGE PUMP
1-2	Connected to V+	Disabled
2-3*	Connected to GND	Enabled

*Default position.

Enable Input (\overline{EN})

The MAX4885 is enabled or disabled through the \overline{EN} pin. Jumper JU3 controls the \overline{EN} pin settings, as shown in Table 3. The MAX4885 is enabled by default.

Table 3. Jumper JU3 Functions

SHUNT POSITION	\overline{EN} PIN	FUNCTION
1-2	Connected to V+	High-impedance mode (disabled)
2-3*	Connected to GND	Normal mode (enabled)

*Default position.

MAX4885 Evaluation Kit

Evaluates: MAX4885

Mode Select (M)

The MAX4885 can be configured as a 1:2 or 2:1 VGA multiplexer by setting JU4 according to Table 4. When JU4 is set high, the MAX4885 acts in 2:1 mode and the HSYNC and VSYNC inputs are buffered to provide level-shifting and drive capability to meet VESA specifications. When JU4 is set low, the MAX4885 is in 1:2 mode and the HSYNC/VSYNC output buffers are disabled and switches pass signals directly. The MAX4885 is set to 1:2 mode by default.

Table 4. Jumper JU4 Functions

SHUNT POSITION	M PIN	FUNCTION
1-2	Connected to V+	2:1 mode
2-3*	Connected to GND	1:2 mode

*Default position.

Select Input (SEL)

By setting JU5 according to Table 5, the MAX4885 routes the standard VGA signal path. By setting JU5 low, VGA signals can be sent from VGA0 to VGA1, or vice versa. By setting JU5 high, VGA signals can be sent from VGA0 to VGA2, or vice versa. JU5 is set low by default.

Table 5. Jumper JU5 Functions

SHUNT POSITION	SEL PIN	SIGNAL PATH
1-2	Connected to V+	VGA0 to VGA2
2-3*	Connected to GND	VGA0 to VGA1

*Default position.

MAX4885 Evaluation Kit

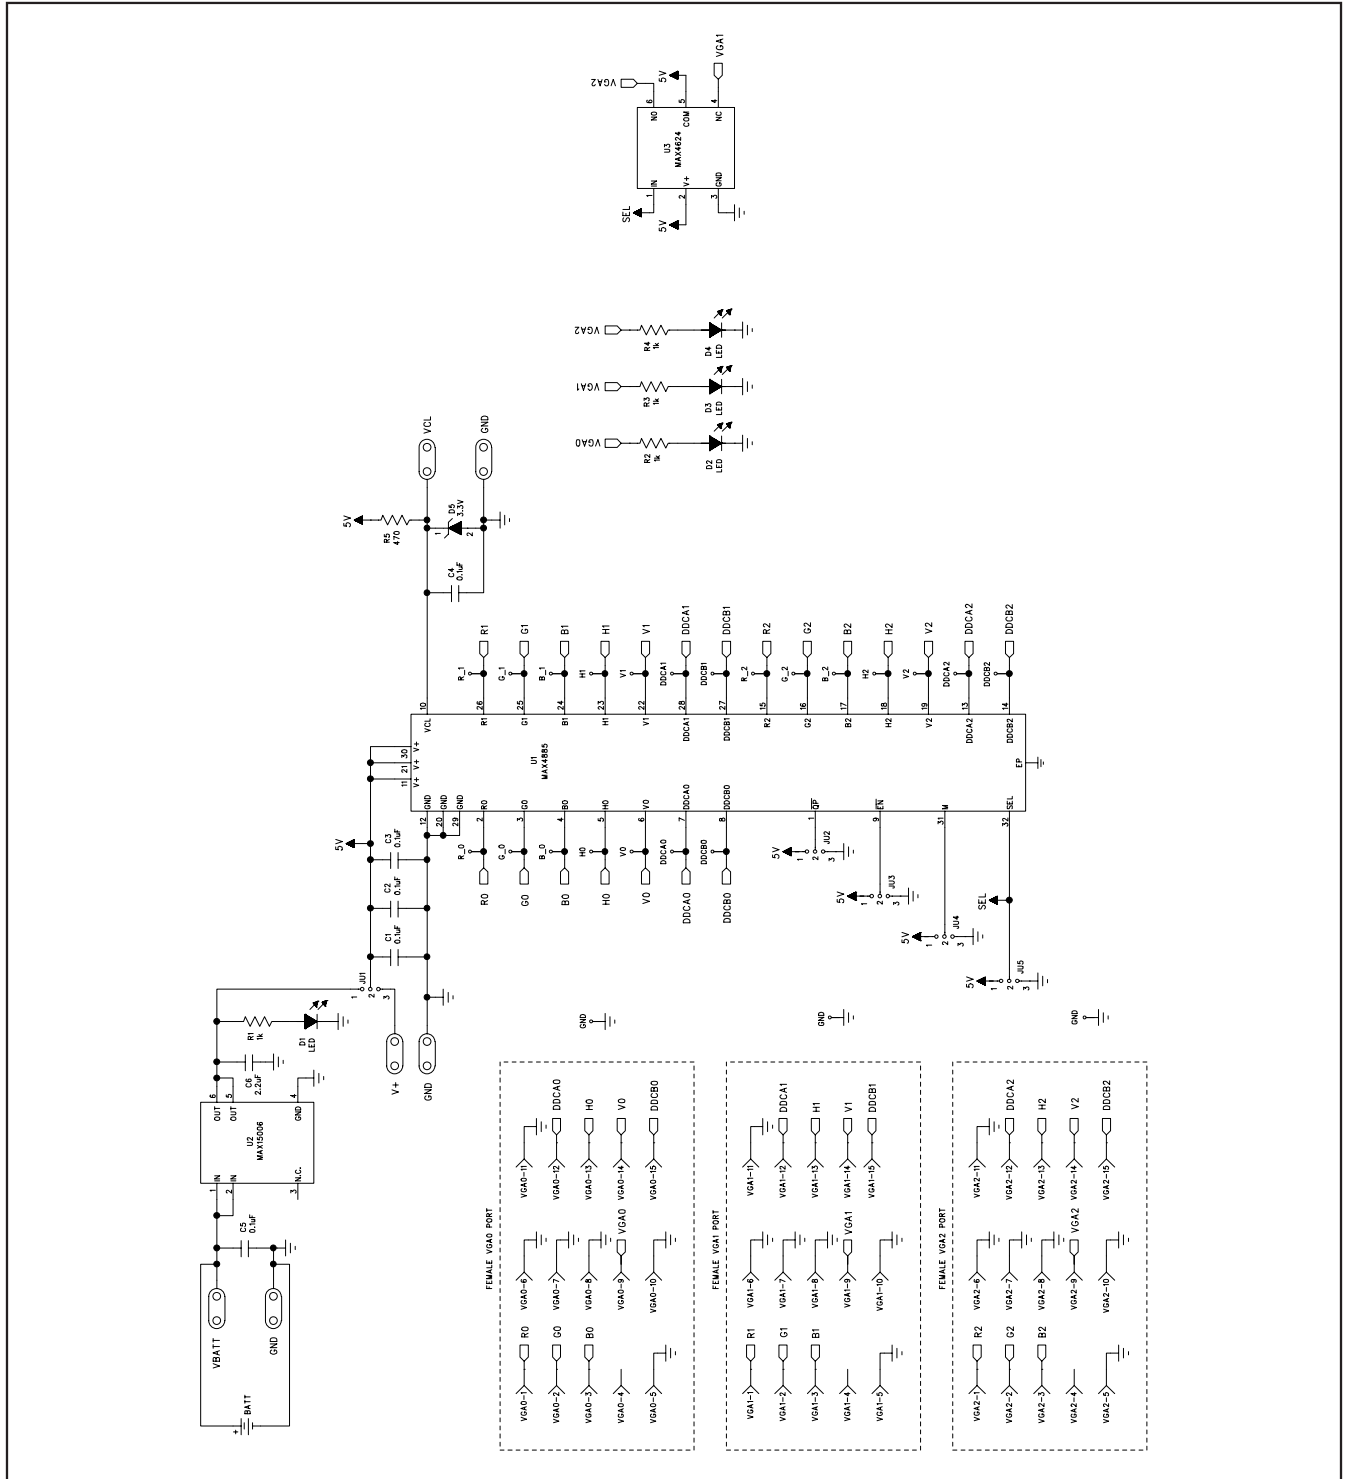


Figure 1. MAX4885 EV Kit Schematic

MAX4885 Evaluation Kit

Evaluates: MAX4885

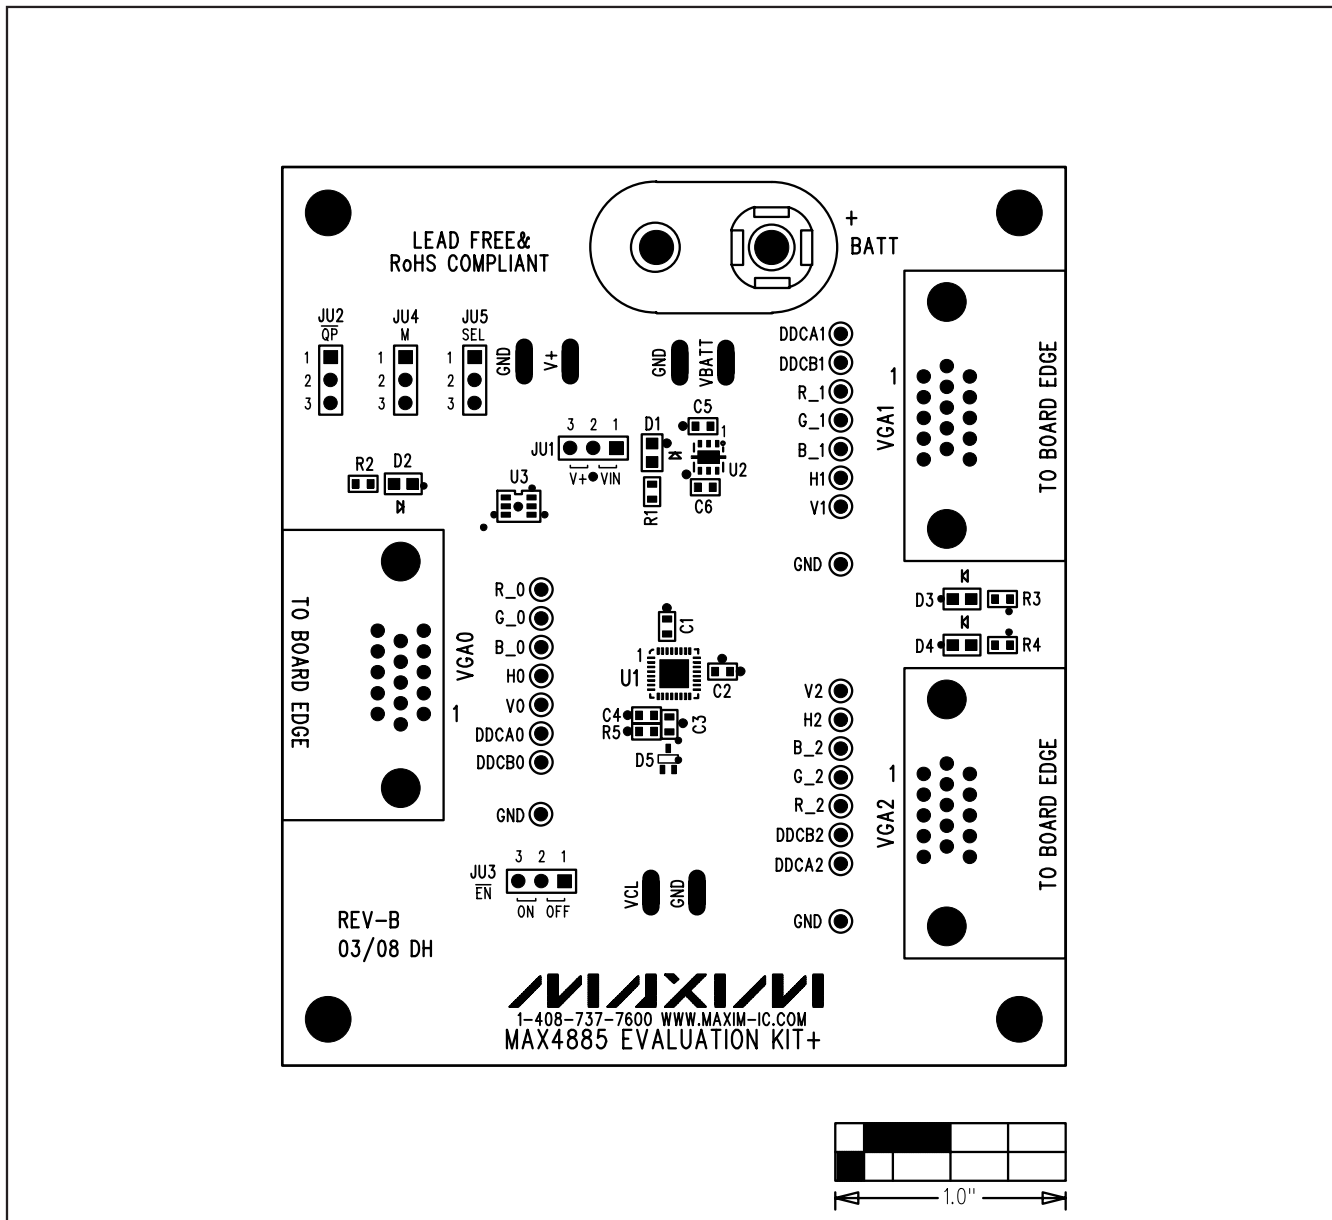


Figure 2. MAX4885 EV Kit Component Placement Guide—Top Silkscreen

MAX4885 Evaluation Kit

Evaluates: MAX4885

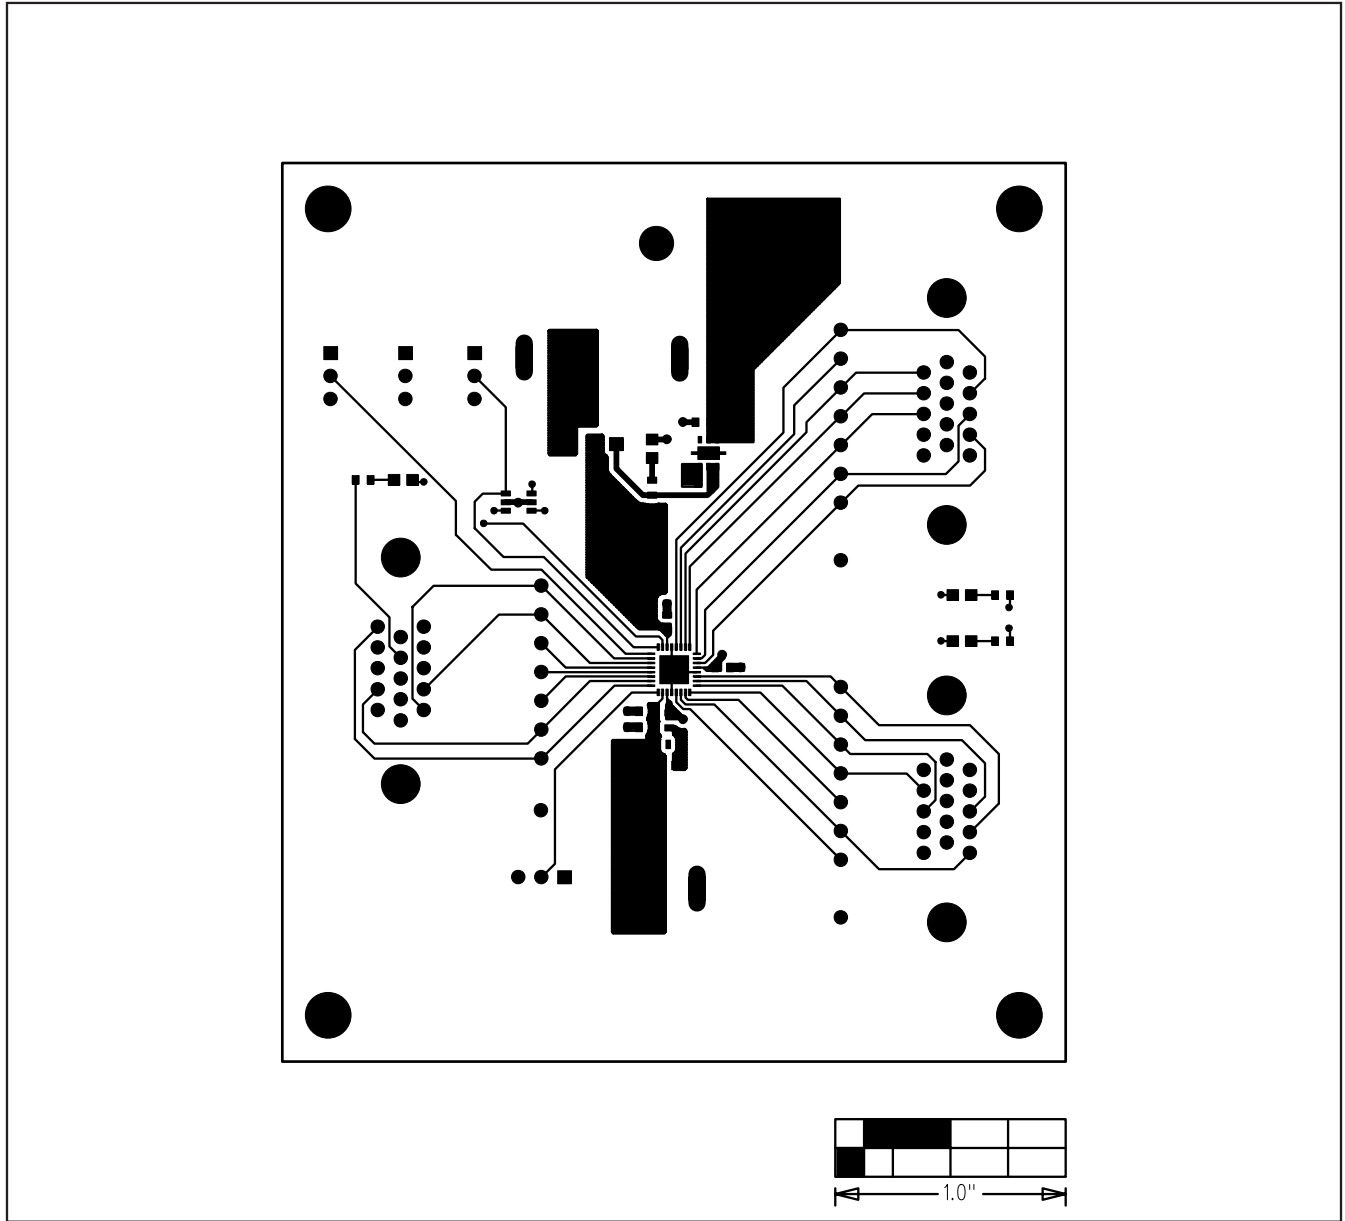


Figure 3. MAX4885 EV Kit PCB Layout—Component Side

MAX4885 Evaluation Kit

Evaluates: **MAX4885**

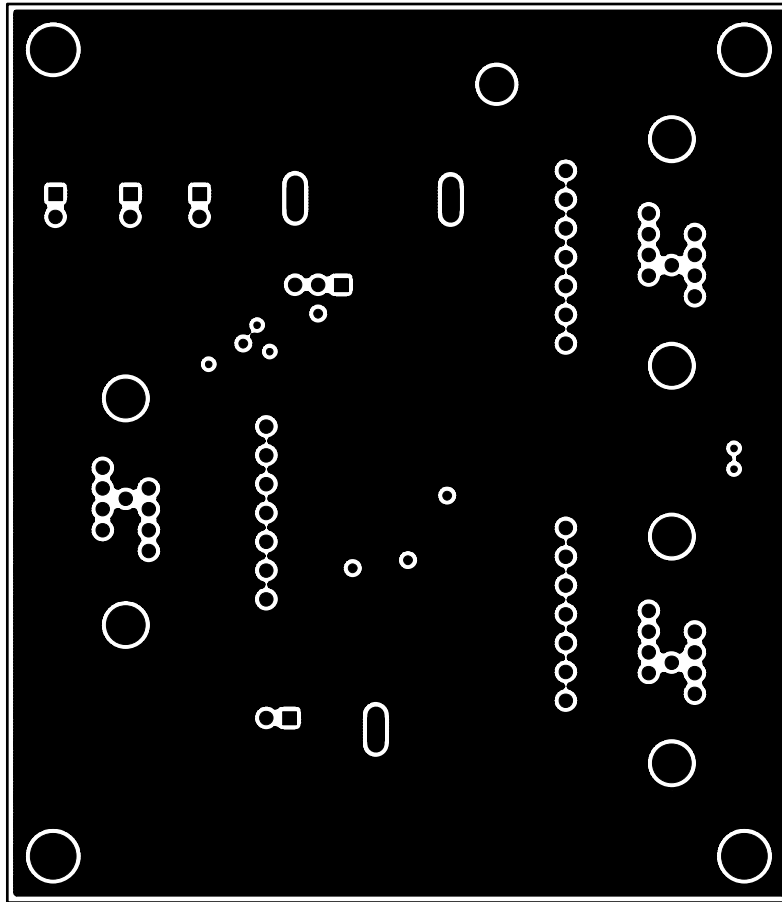


Figure 4. MAX4885 EV Kit PCB Layout—GND Layer 2

MAX4885 Evaluation Kit

Evaluates: MAX4885


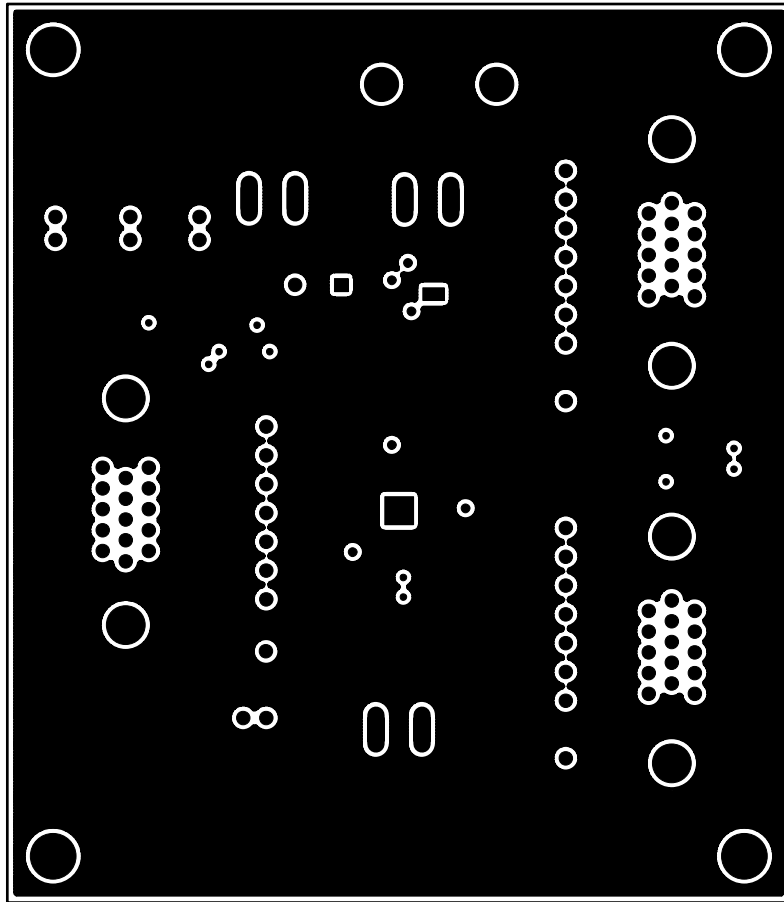


Figure 5. MAX4885 EV Kit PCB Layout—VCC Layer 3

MAX4885 Evaluation Kit

Evaluates: **MAX4885**

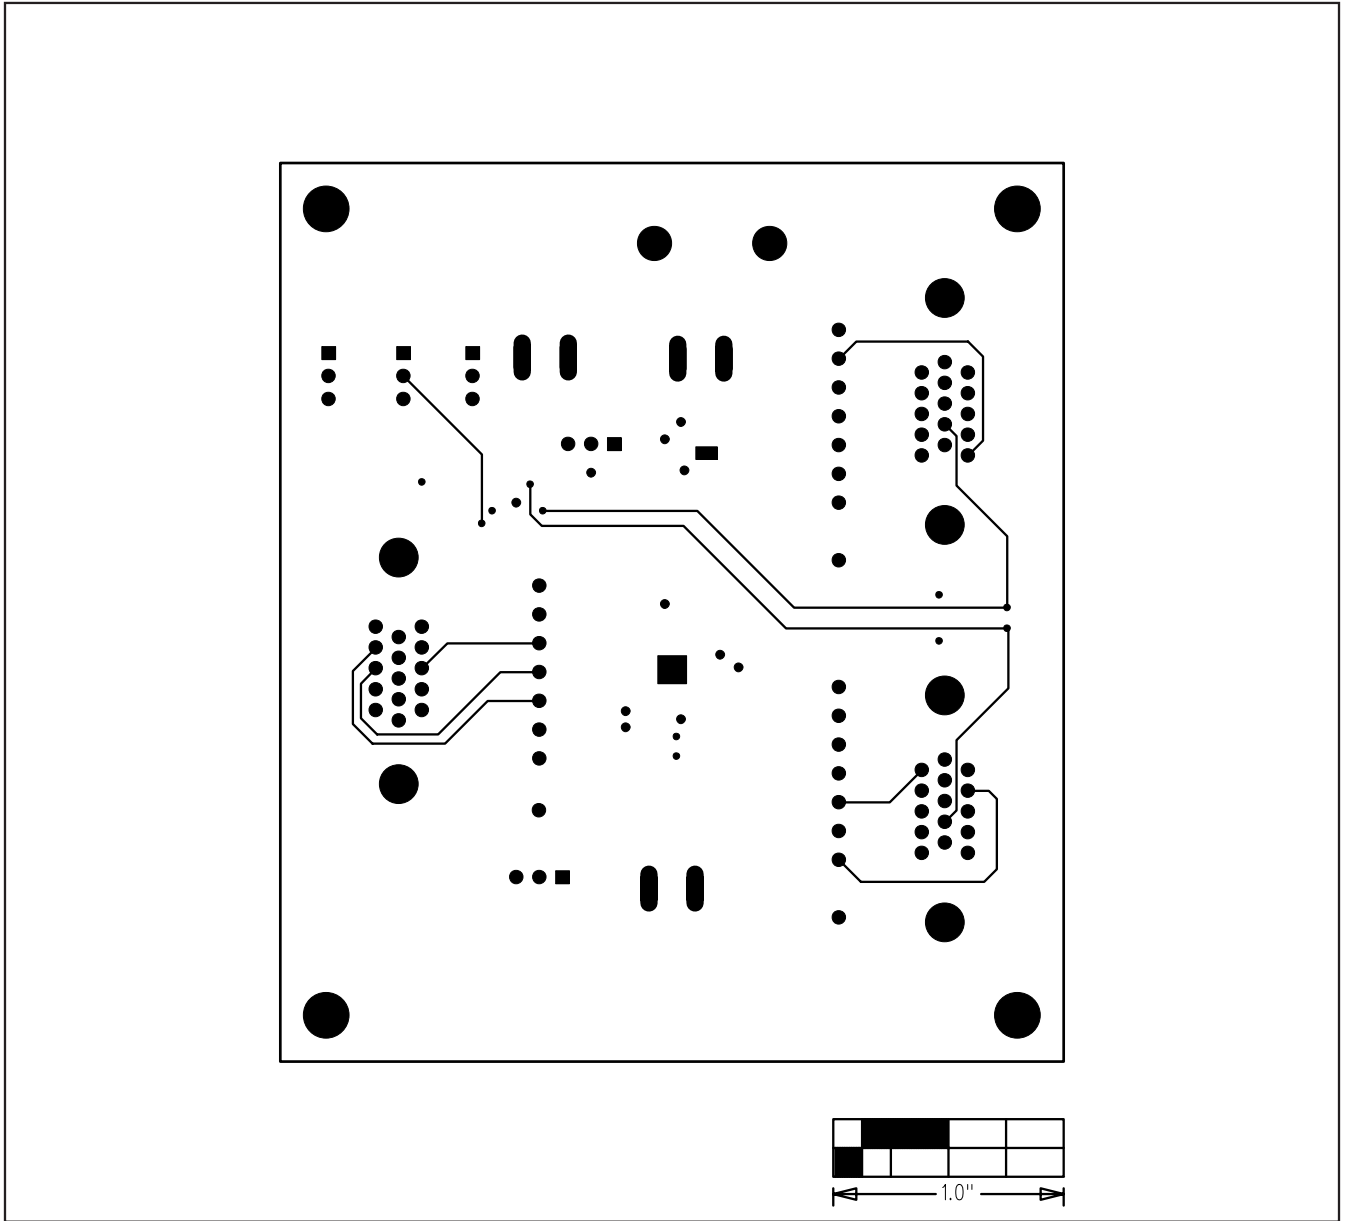


Figure 6. MAX4885 EV Kit PCB Layout—Solder Side

MAX4885 Evaluation Kit

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/08	Initial release	—
1	5/08	EV kit revised from Rev A board to Rev B.	1, 4-9

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**