

EVALUATION KIT
AVAILABLE

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

General Description

The MAX9060–MAX9064 are small single comparators, ideal for a wide variety of portable electronics applications such as cell phones, media players, and notebooks that have extremely tight board space and power constraints. These comparators are offered in both, a miniature 4-bump UCSP™ package with a 1mm x 1mm footprint (as small as two 0402 resistors), and a 5-pin SOT23 package.

The MAX9060–MAX9064 feature an input voltage range of -0.3V to +5.5V independent of supply voltage. These devices maintain high impedance at the inputs even when powered down (V_{CC} or $V_{REF} = 0V$). They also feature internal filtering to provide high RF immunity.

The MAX9060 and MAX9061 feature a patent-pending architecture. Both have open-drain outputs and draw quiescent supply current from a user-supplied reference voltage, V_{REF} , between 0.9V and 5.5V. These devices consume only 100nA (max) supply current and operate over the extended -40°C to +85°C temperature range.

The MAX9062, MAX9063 and MAX9064 are single comparators with an internal 0.2V reference. These devices feature either a push-pull or an open-drain output. They consume only 700nA (max) supply current. The MAX9062, MAX9063, and MAX9064 operate down to $V_{CC} = 1V$ over the extended -40°C to +85°C temperature range.

Applications

Cell Phones
Portable Media Players
Electronic Toys
Notebook Computers
Portable Medical Devices

UCSP is a trademark of Maxim Integrated Products, Inc.

Features

- ◆ Tiny 1mm x 1mm x 0.6mm 4-Bump UCSP
Footprint = Two 0402 Resistors
Also Available in a 5-Pin SOT23 Package
- ◆ Ultra-Low Operating Current (100nA max)
- ◆ Input Voltage Range = -0.3V to +5.5V
- ◆ External REF Range = 0.9V to 5.5V
(MAX9060/MAX9061)
- ◆ Internal REF Voltage = 0.2V
(MAX9062/MAX9063/MAX9064)
- ◆ 15µs Propagation Delay
- ◆ -40°C to +85°C Extended Temperature Range

Ordering Information


| PART | PIN-PACKAGE | TOP MARK |
|-------------|-------------|----------|
| MAX9060EBS+ | 4 UCSP | AFX |
| MAX9060EUK+ | 5 SOT23 | AFFG |
| MAX9061EBS+ | 4 UCSP | AFY |
| MAX9061EUK+ | 5 SOT23 | AFFH |
| MAX9062EBS+ | 4 UCSP | AFZ |
| MAX9062EUK+ | 5 SOT23 | AFFI |
| MAX9063EBS+ | 4 UCSP | AGA |
| MAX9063EUK+ | 5 SOT23 | AFFJ |
| MAX9064EBS+ | 4 UCSP | AGB |
| MAX9064EUK+ | 5 SOT23 | AFFK |

Note: All devices are specified over the extended -40°C to +85°C operating temperature range.

+ Denotes a lead(Pb)-free/RoHS-compliant package.

Selector Guide and Typical Operating Circuits appear at end of data sheet.

Pin Configuration

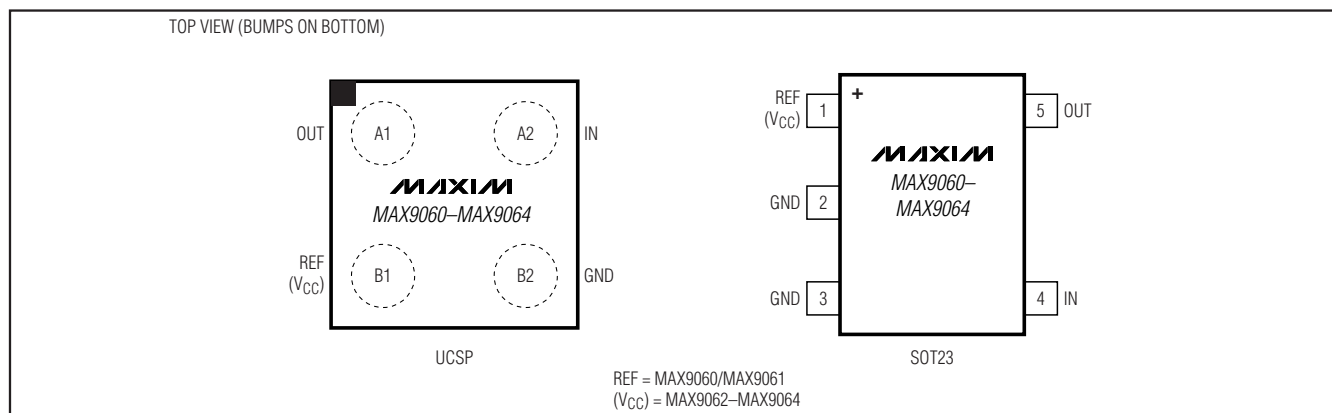

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-------------------------------------|
| V _{CC} , REF, IN to GND | -0.3V to +6V |
| OUT to GND (MAX9060-MAX9063) | -0.3V to +6V |
| OUT to GND (MAX9064 Only) | -0.3V to + (V _{CC} + 0.3V) |
| Output Short-Circuit Current Duration | 10s |
| Input Current into Any Terminal | ±20mA |
| Continuous Power Dissipation | |
| 4-Bump UCSP (derate 3.0mW/°C above +70°C) | 238 mW |
| 5-Pin SOT23 (derate 3.9mW/°C above +70°C) | 312 mW |

| | |
|-------------------------------------|-----------------|
| Operating Temperature Range | -40°C to +85°C |
| Junction Temperature | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Bump Temperature (soldering) Reflow | +235°C |
| Lead Temperature (soldering, 10s) | +300°C |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

MAX9060/MAX9061 ELECTRICAL CHARACTERISTICS

(V_{REF} = 1.8V, R_{PULLUP} = 10kΩ to V_{PULLUP} = 3.3V, T_A = -40°C to +85°C. Typical values are at T_A = +25°C, unless otherwise noted.)
(Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|--|--------------------------|---|------|-------|------|-------|
| DC CHARACTERISTICS | | | | | | |
| Input Offset Voltage (Note 2) | V _{OS} | T _A = +25°C | | 1.3 | 6 | mV |
| | | | | | 9 | |
| Hysteresis | V _{HYS} | (Note 3) | | ±12 | | mV |
| Input Voltage Range | V _{IN} | | -0.3 | | +5.5 | V |
| Input Bias Current | I _{IN} | 0V < V _{IN} < V _{REF} + 0.6V | | | 40 | nA |
| | | V _{REF} + 0.6V < V _{IN} < 5.5V | | 10 | 100 | |
| Input Shutdown Current | I _{IN_PD} | V _{REF} = 0, V _{IN} = 5.5V (Note 4) | | < 0.1 | 27 | nA |
| Output Voltage Low | V _{OL} | I _{SINK} = 25μA, V _{REF} = 0.9V, T _A = +25°C | | 0.04 | 0.20 | V |
| | | I _{SINK} = 200μA, V _{REF} = 1.2V | | 0.08 | 0.20 | |
| | | I _{SINK} = 500μA, V _{REF} = 1.8V | | 0.13 | 0.23 | |
| | | I _{SINK} = 1.2mA, V _{REF} = 5.5V | | 0.19 | 0.50 | |
| Output Leakage Current (OUT = High) | I _{OUT_LEAKAGE} | V _{PULLUP} = 5.5V (Note 4) | | < 0.1 | 35 | nA |
| AC CHARACTERISTICS | | | | | | |
| Propagation Delay | t _{PD} | Overdrive = ±100mV (Note 5) | | 25 | | μs |
| Fall Time | t _F | C _L = 10pF | | 14 | | ns |
| REF SUPPLY | | | | | | |
| REF Voltage | V _{REF} | Guaranteed by V _{OS} tests | 0.9 | | 5.5 | V |
| REF Input Current | I _{REF} | V _{REF} = 0.9V, V _{IN} = V _{REF} , T _A = +25°C | | 50 | 100 | nA |
| | | V _{REF} = 1.8V, V _{IN} = V _{REF} , T _A = +25°C | | 60 | | |
| | | V _{REF} = 5.5V, V _{IN} = V _{REF} , T _A = +25°C | | 170 | 320 | |
| | | V _{REF} = 5.5V, V _{IN} = V _{REF} , -40°C < T _A < +85°C | | | 350 | |
| REF Rejection Ratio | RRR | V _{REF} = 0.9V to 5.5V, T _A = +25°C | 63 | 90 | | dB |
| Power-Up Time | t _{ON} | | | 3 | | ms |

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

MAX9060-MAX9064

MAX9062/MAX9063/MAX9064 ELECTRICAL CHARACTERISTICS

($V_{CC} = 3.3V$, $R_{PULLUP} = 10k\Omega$ to $V_{PULLUP} = 3.3V$ for MAX9062/MAX9063, $T_A = -40^\circ C$ to $+85^\circ C$. Typical values at $T_A = +25^\circ C$, unless otherwise noted.) (Note 1)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|--------------------|---|------|------------------|------------------|------------------|
| DC CHARACTERISTICS | | | | | | |
| Input Voltage Range | V_{IN} | Guaranteed by I_{IN} test | -0.3 | | +5.5 | V |
| Input Bias Current | I_{IN} | $V_{IN} = 0.2V$ to $5.5V$ (Note 4) | | 0.06 | 15 | nA |
| Input Leakage Current | I_{IN_SHDN} | $V_{CC} = 0$, $V_{IN} = 5.5V$ (Note 4) | | < 0.1 | 15 | nA |
| Output Voltage Low | V_{OL} | $I_{SINK} = 50\mu A$, $V_{CC} = 1.0V$ | | 0.03 | 0.2 | V |
| | | $I_{SINK} = 200\mu A$, $V_{CC} = 1.2V$ | | 0.08 | 0.20 | |
| | | $I_{SINK} = 500\mu A$, $V_{CC} = 1.8V$ | | 0.13 | 0.23 | |
| | | $I_{SINK} = 0.75mA$, $V_{CC} = 3.3V$ | | 0.14 | 0.3 | |
| | | $I_{SINK} = 1.2mA$, $V_{CC} = 5.5V$ | | 0.19 | 0.5 | |
| Output Voltage High (MAX9064 Only) | V_{OH} | $I_{SOURCE} = 15\mu A$, $V_{CC} = 1.0V$ | | $V_{CC} - 0.08V$ | $V_{CC} - 0.2V$ | V |
| | | $I_{SOURCE} = 40\mu A$, $V_{CC} = 1.2V$ | | $V_{CC} - 0.08V$ | $V_{CC} - 0.20V$ | |
| | | $I_{SOURCE} = 180\mu A$, $V_{CC} = 1.8V$ | | $V_{CC} - 0.15V$ | $V_{CC} - 0.23V$ | |
| | | $I_{SOURCE} = 0.3mA$, $V_{CC} = 3.3V$ | | $V_{CC} - 0.13V$ | $V_{CC} - 0.3V$ | |
| | | $I_{SOURCE} = 0.75mA$, $V_{CC} = 5.5V$ | | $V_{CC} - 0.24V$ | $V_{CC} - 0.5V$ | |
| Output Leakage Current (MAX9062/MAX9063 Only) | $I_{OUT_LEAKAGE}$ | OUT = high, $V_{PULLUP} = 5.5V$ (Note 4) | | < 0.1 | 15 | nA |
| AC CHARACTERISTICS | | | | | | |
| Propagation Delay | t_{PD} | $V_{OVERDRIVE} = \pm 100mV$ (Note 5) | | 15 | | μs |
| Fall Time | t_F | $C_L = 10pF$ | | 14 | | ns |
| Rise Time | t_R | $C_L = 10pF$, MAX9064 only | | 30 | | ns |
| REFERENCE VOLTAGE | | | | | | |
| Input Threshold (Note 6) | V_{REF} | $T_A = +25^\circ C$ | 188 | 200 | 212 | mV |
| | | $T_A = -40^\circ C$ to $+85^\circ C$ | 185 | 200 | 215 | |
| Input Threshold Hysteresis | V_{HYS} | $T_A = -40^\circ C$ to $+85^\circ C$ (Note 3) | | ± 0.9 | | mV |
| REF Tempco | V_{REF_TEMPCO} | (Note 7) | | 6 | | $\mu V/^\circ C$ |
| Power-Supply Rejection Ratio | PSRR | $V_{CC} = 1.0V$ to $5.5V$ | 40 | 53 | | dB |
| POWER SUPPLY | | | | | | |
| Supply Voltage | V_{CC} | Guaranteed by V_{OL}/V_{OH} tests | 1.0 | | 5.5 | V |
| Supply Current | I_{CC} | $V_{CC} = 1.0V$ | | 0.4 | 0.7 | μA |
| | | $V_{CC} = 5.5V$ | | 0.6 | 1.1 | |
| Power-Up Time | t_{ON} | | | 3 | | ms |

Note 1: All devices are 100% production tested at $T_A = +25^\circ C$. Temperature limits are guaranteed by design.

Note 2: Guaranteed by ATE and/or bench characterization over temperature. V_{OS} is the average of the trip points minus V_{REF} .

Note 3: Hysteresis is half the input voltage difference between the two switching points.

Note 4: Too small to be measured in an ATE test environment. Only gross test to catch failures is implemented.

Note 5: Overdrive is defined as the voltage above or below the switching points.










Note 6: Guaranteed by ATE and/or bench characterization over temperature. V_{REF} is the average of the trip points minus 200mV.

Note 7: Includes reference error along with comparator offset voltage error.

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Typical Operating Characteristics

($V_{CC} = 3.3V$, $V_{REF} = 1.8V$, $R_{PULLUP} = 10k\Omega$ to $V_{PULLUP} = 3.3V$ for MAX9060-MAX9063, $GND = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

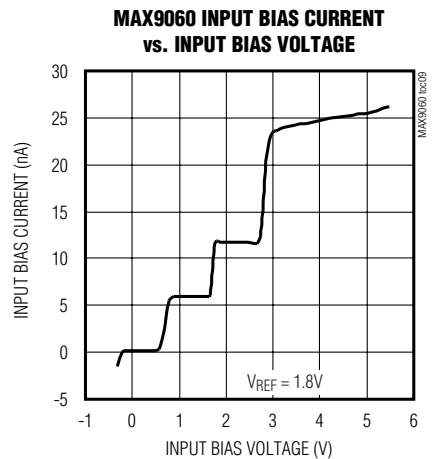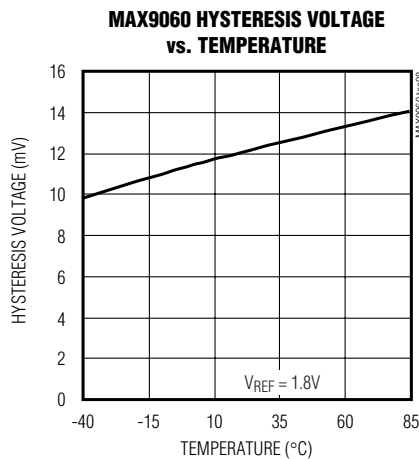
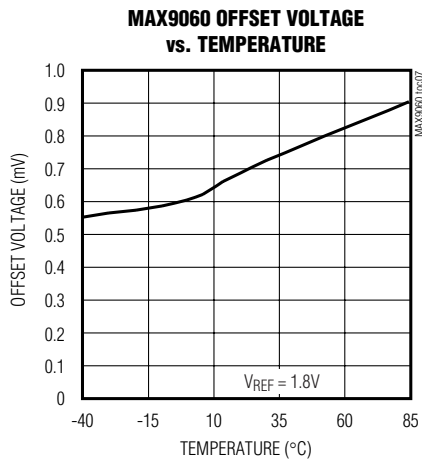
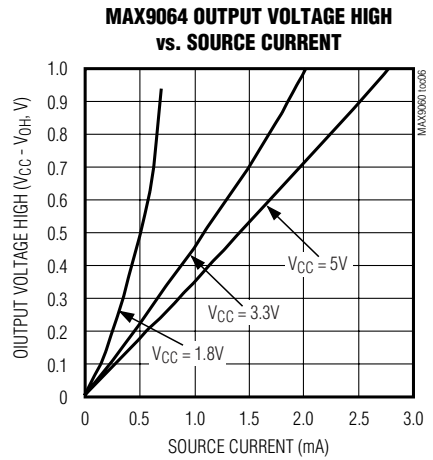
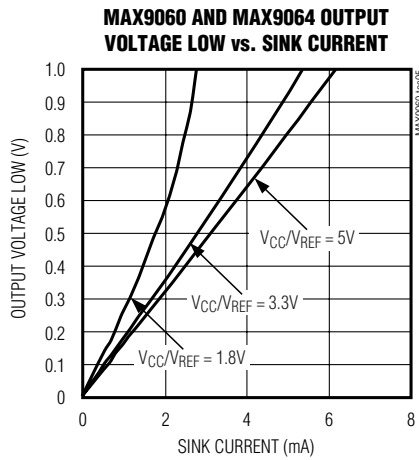
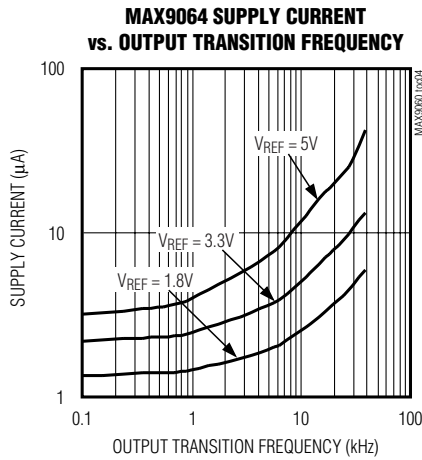
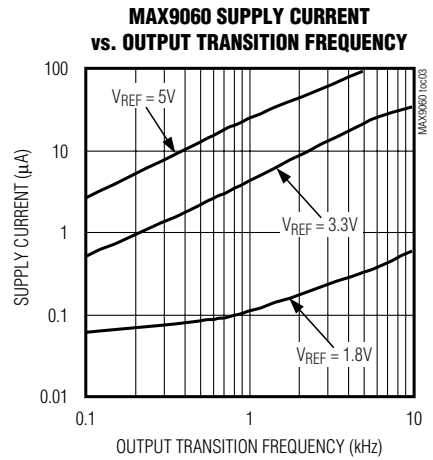
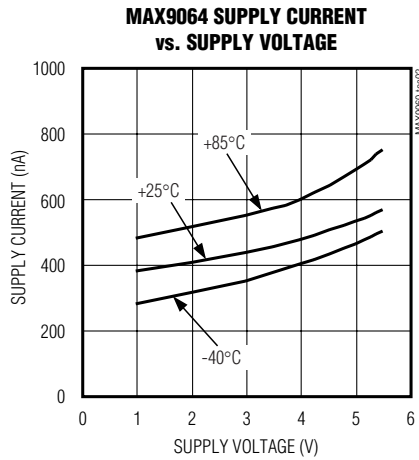
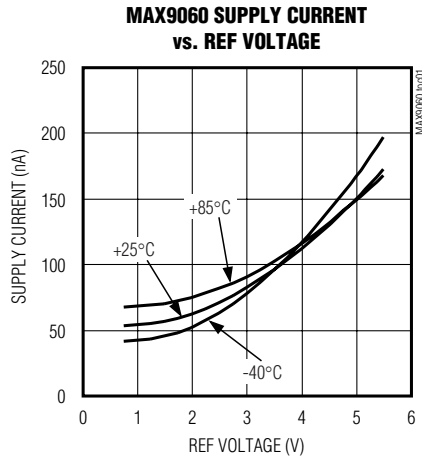


Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $V_{REF} = 1.8V$, $R_{PULLUP} = 10k\Omega$ to $V_{PULLUP} = 3.3V$ for MAX9060–MAX9063, $GND = 0$, $T_A = +25^\circ C$, unless otherwise noted.)







MAX9060–MAX9064

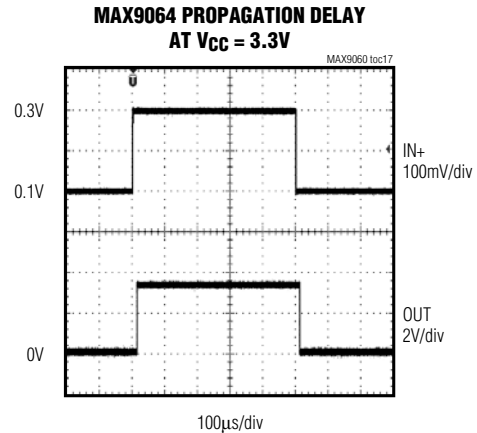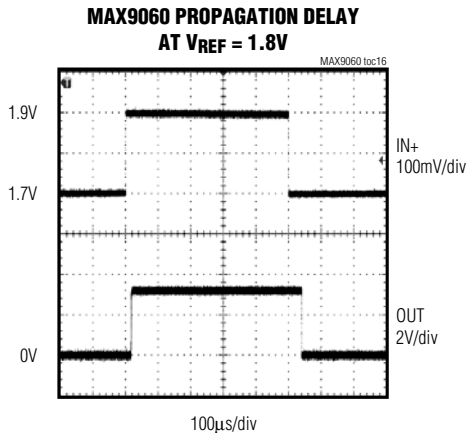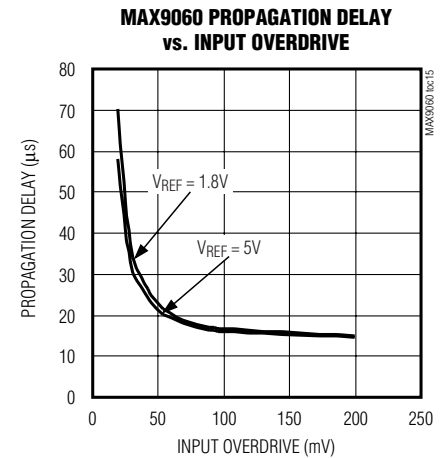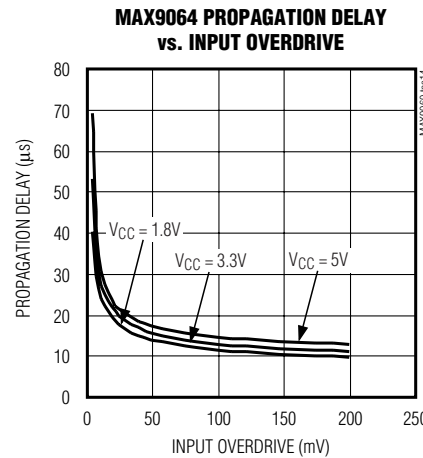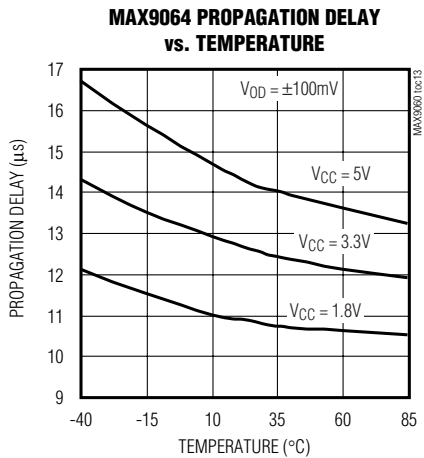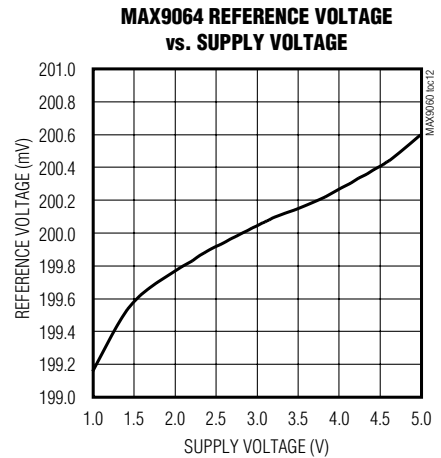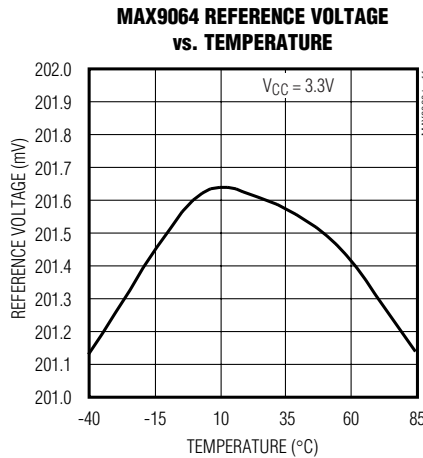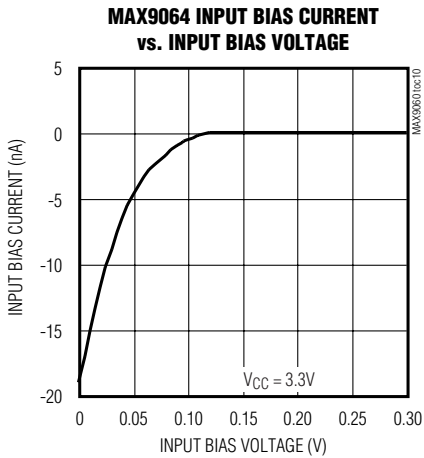

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Typical Operating Characteristics (continued)

($V_{CC} = 3.3V$, $V_{REF} = 1.8V$, $R_{PULLUP} = 10k\Omega$ to $V_{PULLUP} = 3.3V$ for MAX9060-MAX9063, $GND = 0$, $T_A = +25^\circ C$, unless otherwise noted.)

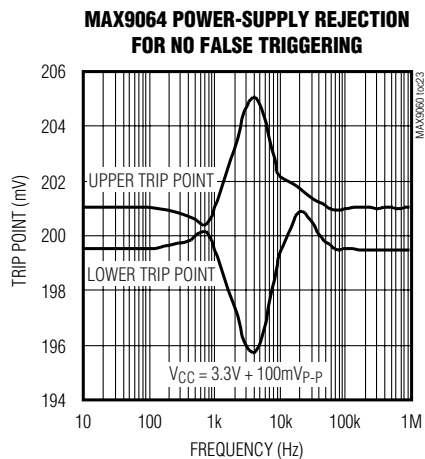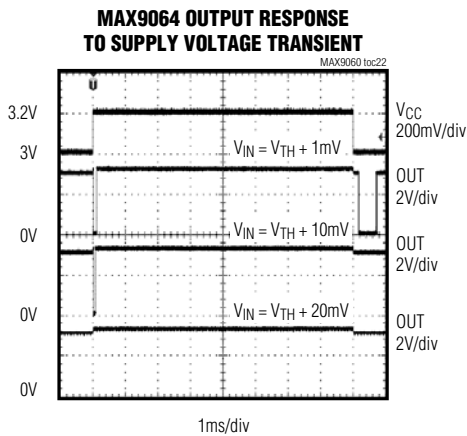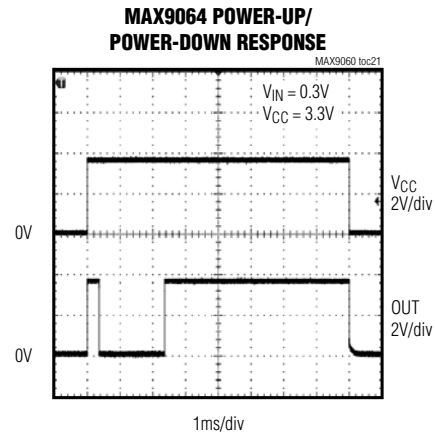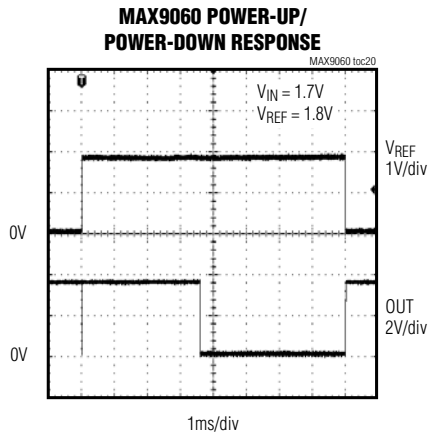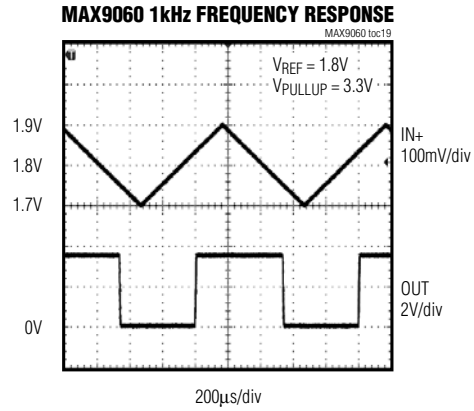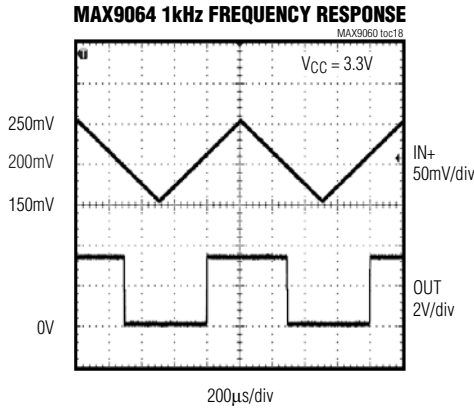

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Pin Description

| PIN | | | | NAME | FUNCTION |
|--------------------|-------------------------------|--------------------|-------------------------------|------|--|
| UCSP | | SOT23 | | | |
| MAX9060 MAX9061 | MAX9062 MAX9063 MAX9064 | MAX9060 MAX9061 | MAX9062 MAX9063 MAX9064 | | |
| A1 | A1 | 5 | 5 | OUT | Comparator Output. The MAX9060–MAX9063 have open-drain outputs. The MAX9064 has a push-pull output. |
| A2 | A2 | 4 | 4 | IN | Comparator Input. The MAX9060, MAX9062, and MAX9064 have noninverting inputs. The MAX9061 and MAX9063 have inverting inputs. |
| — | B1 | — | 1 | VCC | Power-Supply Voltage. Bypass to ground with a 0.1µF bypass capacitor. |
| B1 | — | 1 | — | REF | External Reference Input. REF also supplies power to the device. Bypass to ground with a 0.1µF bypass capacitor. |
| B2 | B2 | 2, 3 | 2, 3 | GND | Ground. |

MAX9060–MAX9064

Detailed Description

The MAX9060–MAX9064 are extremely small comparators ideal for compact, low-current, and low-voltage applications.

The MAX9060/MAX9061 consume only 50nA (typ) operating current, while the MAX9062/MAX9063/MAX9064 consume only 400nA (typ). The low-voltage operating capability of the MAX9060–MAX9064 makes these devices extremely attractive to long-life battery-operated devices—these applications can now use a single digital power-supply rail to power the new generation of microcontrollers (which can be down to 0.9V). A single AA/AAA cell can drop down to 0.9V in full discharge. All parts are available in a tiny 4-bump UCSP, that is only 0.6mm tall, and occupies a 1mm x 1mm footprint and a 5-pin SOT23.

Input Stage Circuitry

Noninverting inputs are available on the MAX9060/MAX9062/MAX9064 and inverting inputs are available on the MAX9061/MAX9063.

The MAX9060–MAX9064 incorporate an innovative input stage architecture that allows their input voltage to exceed VCC by several volts (limited only by the *Absolute Maximum Ratings*). This is unlike traditional

comparators that have an input ESD diode clamp between the input and VCC, limiting this maximum over-voltage to about 0.3V. The MAX9060–MAX9064 architecture maintains a high input impedance to input signals even when the device power-supply voltage is completely turned off (VCC or REF taken to 0V). This greatly benefits flexible power-saving schemes to be easily implemented in advanced battery-operated devices. On-chip filtering provides immunity from any RF noise being picked up by input traces. These devices feature an internal temperature-compensated, low-power 0.2V reference voltage.

Output Stage Structure

The MAX9060–MAX9063 have open-drain outputs that allow them to interface to logic circuitry running from supply voltages other than the one supplied to the part. These devices require an external pullup resistor or current source for proper operation. Many microcontroller digital inputs ports can be readily programmed to include these.

The MAX9064 has a push-pull output stage that can both sink and source current, eliminating the need for an external pullup resistor. In this case, the MAX9064 uses the microcontroller's power supply as VCC.

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Table 1. How Devices Behave Under Various Input Voltage Conditions

| PART | INPUT VOLTAGE CONDITIONS | ACTION AT OUTPUT |
|---------|--------------------------|---|
| MAX9060 | $V_{IN} > V_{REF}$ | External pullup resistor pulls output high. |
| | $V_{IN} < V_{REF}$ | Output asserts low. |
| MAX9061 | $V_{IN} > V_{REF}$ | Output asserts low. |
| | $V_{IN} < V_{REF}$ | External pullup resistor pulls output high. |
| MAX9062 | $V_{IN} > 0.2V$ | External pullup resistor pulls output high. |
| | $V_{IN} < 0.2V$ | Output asserts low. |
| MAX9063 | $V_{IN} > 0.2V$ | Output asserts low. |
| | $V_{IN} < 0.2V$ | External pullup resistor pulls output high. |
| MAX9064 | $V_{IN} > 0.2V$ | Output asserts high. |
| | $V_{IN} < 0.2V$ | Output asserts low. |

Applications Information

Bypassing REF/VCC

Place a 0.1µF capacitor between REF or VCC and GND as close as possible to the device. During a switching event, all comparators draw a current spike from their power-supply rails. This current spike is minimized by the use of an internal break-before-make design.

Hysteresis Operation

The MAX9060-MAX9064 feature internal hysteresis for noise immunity and glitch-free operation. If additional hysteresis is needed, an external positive feedback network can be easily implemented on the MAX9060, MAX9062, and MAX9064 noninverting input devices.

Additional external hysteresis is not recommended for the MAX9061 due to possible crossover current-related noise problems. Additional external hysteresis is not possible on the MAX9063 because the noninverting input of the comparator is not externally accessible.

Adaptive Signal Level Detector

The MAX9060 and MAX9061 can be used as an adaptive signal-level detector. Feed a DAC output voltage to REF and connect the input to a variable signal level. As the DAC output voltage is varied from 0.9V to 5.5V, a corresponding signal level threshold-detector circuit is implemented. See Figure 1.


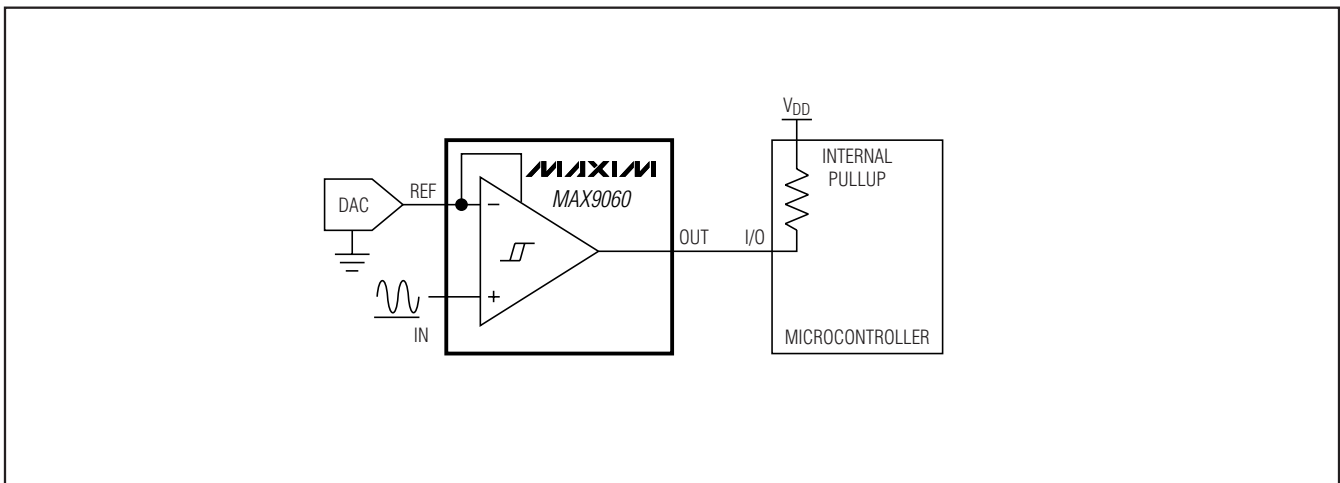


Figure 1. Adaptive Signal Level Detector

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Typical Operating Circuits

MAX9060-MAX9064

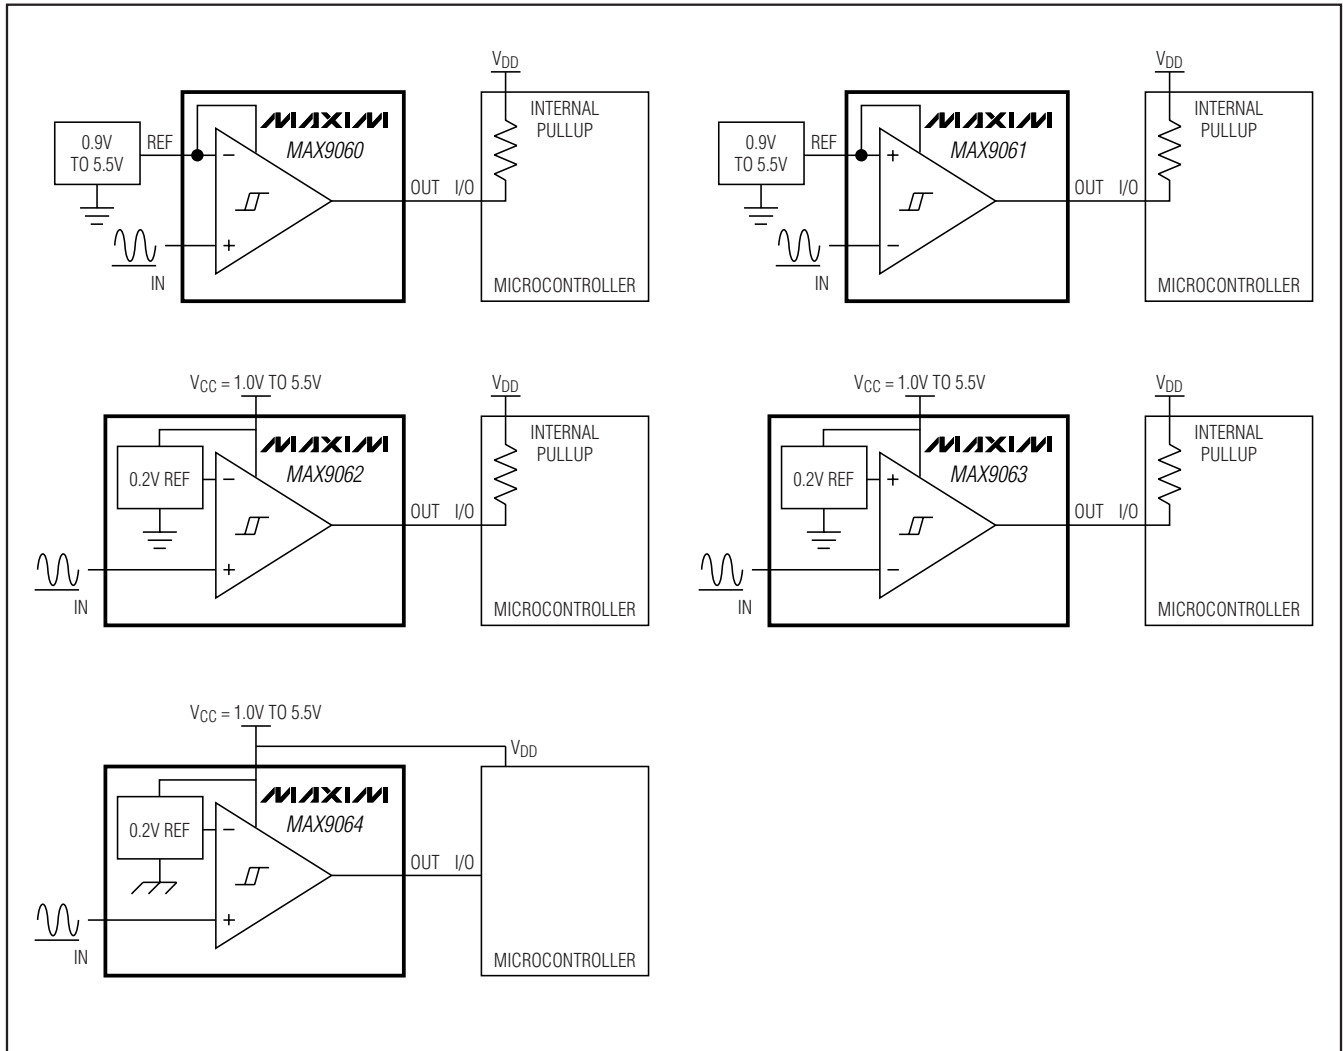

Selector Guide

| PART | REFERENCE VOLTAGE | INPUT | OUTPUT |
|---------|-------------------|--------------|------------|
| MAX9060 | External | Noninverting | Open drain |
| MAX9061 | External | Inverting | Open drain |
| MAX9062 | 0.2V | Noninverting | Open drain |
| MAX9063 | 0.2V | Inverting | Open drain |
| MAX9064 | 0.2V | Noninverting | Push-pull |

Chip Information

PROCESS: BiCMOS

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Package Information

For the latest package outline information, go to www.maxim-ic.com/packages.

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO. |
|--------------|--------------|-------------------------|
| 4 UCSP | B4-1 | 21-0117 |
| 5 SOT23 | U5-2 | 21-0057 |

TOP VIEW

| COMMON DIMENSIONS | |
|-------------------|----------------|
| A | 0.62±0.05-0.08 |
| A1 | 0.29±0.02 |
| A2 | 0.33 REF. |
| b | ∅0.35±0.03 |
| D1 | 0.50 BASIC |
| E1 | 0.50 BASIC |
| e | 0.50 BASIC |
| SD | 0.25 BASIC |
| SE | 0.25 BASIC |

| PKG. CODE | VARIABLE DIMENSIONS | | DEPOPULATED SOLDER BALLS |
|-----------|---------------------|-----------|--------------------------|
| | D | E | |
| B4-1 | 1.00±0.05 | 1.00±0.05 | NONE |
| B4-2 | 1.05±0.05 | 1.05±0.05 | NONE |
| B4-3 | 1.10±0.05 | 1.10±0.05 | NONE |
| B4-4 | 0.97±0.05 | 0.97±0.05 | NONE |

NOTES:

- ALL DIMENSIONS ARE IN MILLIMETERS.
- PRODUCT MARKING: NUMBER OF CHARACTERS AND LINES VARY PER PRODUCT.

BOTTOM VIEW

SIDE VIEW


| | | |
|---|--|------------------------------|
| | | |
| <small>PROPRIETARY INFORMATION</small> TITLE: PACKAGE OUTLINE, 2x2 UCSP | | |
| <small>APPROVAL</small> | <small>DOCUMENT CONTROL NO.</small> 21-0117 | <small>REV.</small> G 1/1 |

4L UCSP 2x2 EPS

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Package Information (continued)

For the latest package outline information, go to www.maxim-ic.com/packages.

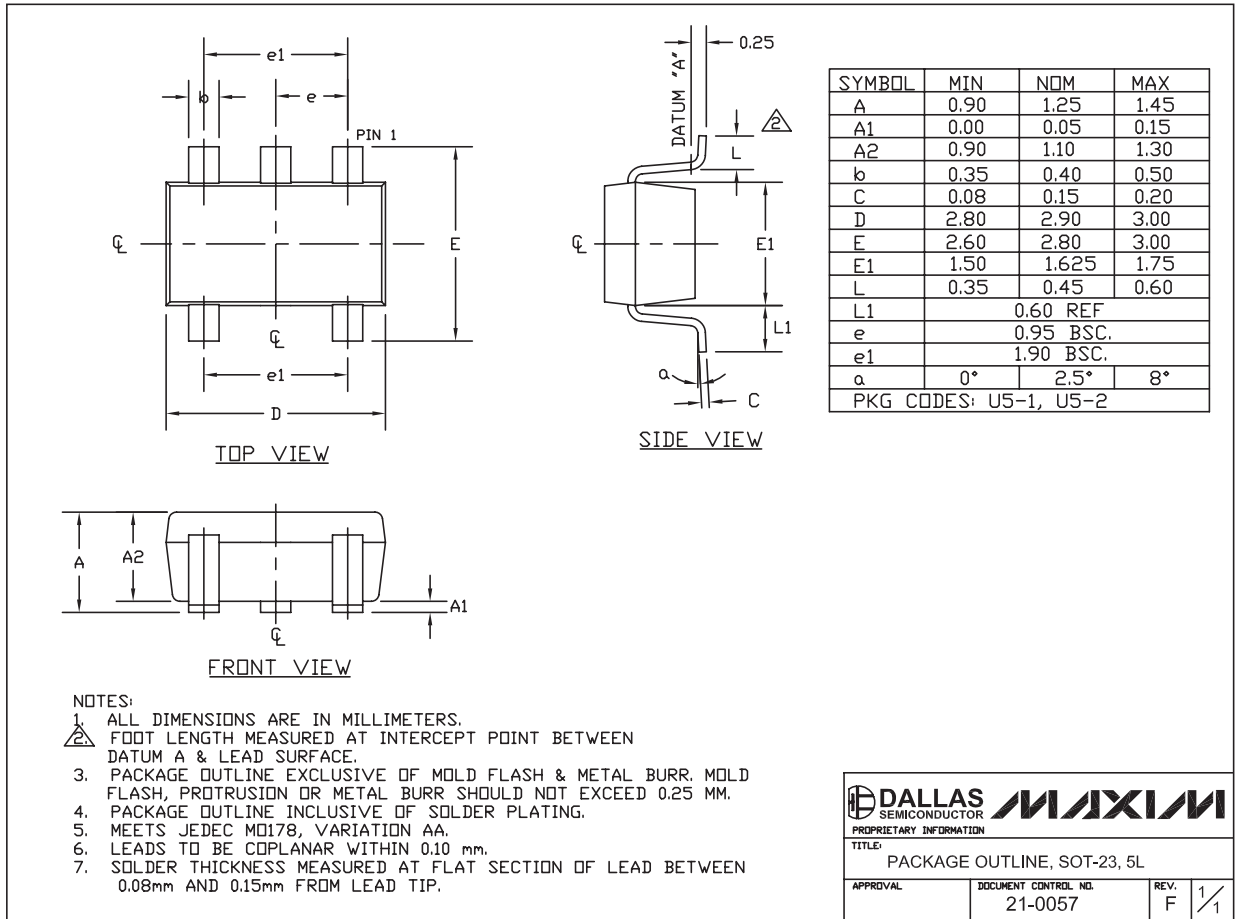

SOT-23 5L.EPS

MAX9060-MAX9064

Ultra-Small, Low-Power Single Comparators in 4-Bump UCSP and 5-SOT23

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|------------------------|----------------------|---|----------------------|
| 0 | 5/08 | Initial release | — |
| 1 | 1/09 | Corrected ultra-low operating current value | 1 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 _____ **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**